

SYLVANIA

INDUSTRIAL LAMPS



240

cd/k
m

15

Industrial



The ideal lighting solution for

Special incandescent lamps

- * Oven
- * Rough Service
- * Tubular
- * High Wattage
- * Low Voltage



In industry, particularly strict demands have to be met for lighting. Not only is operational safety put to the test, but also concerning life span, light production, use and reliability, the standard is much higher. Each of the lamps which Sylvania has included in this brochure fulfils very specific applications and has been specially constructed to fully meet the most diverse requirements.



Oven


Oven lamps have as chief characteristic a high temperature resistance, up to 300° C, combined with a low power consumption.



Rough Service



Thanks to a strengthened filament construction of a simple coil, supported by 5 or 7 supports (3 or 5 more in comparison with standard GLS incandescent lamps) these lamps are shock resistant, withstand continuous vibrations and are dustproof.

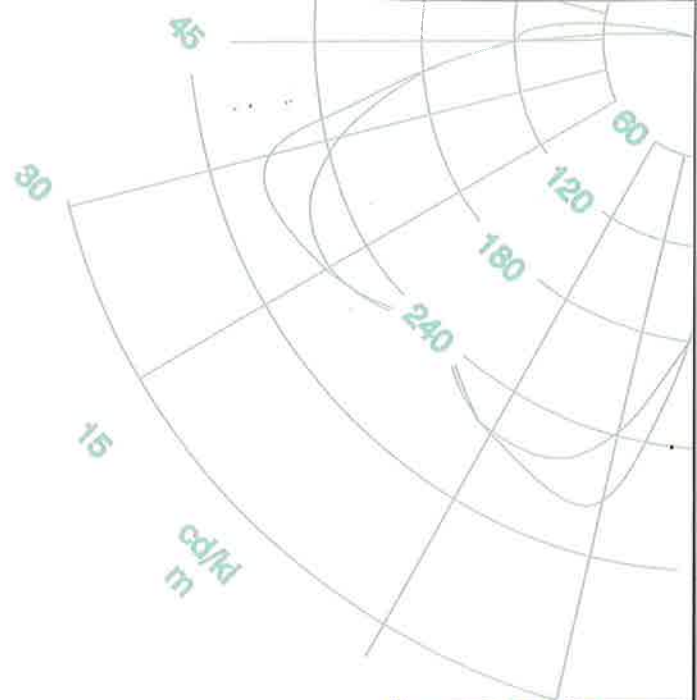

Tubular

The number of applications for tubular lamps is practically unlimited. You can find them in fridges, extractor fans, shaving mirrors, sewing machines, control panels, bedside fittings, ...



High Wattage

The "High Wattage" lamps are especially recommended for large industrial halls, garages, work places, cellars and so on... where a high bright light output is required.




Low Voltage

Sylvania has a very extensive range of "Low Voltage" lamps. They are all equipped with standard lamp caps and are mainly used in machine lighting, the shipping industry, isolated spaces where energy is generated by a generator or batteries and for emergency lighting.

Oven


PIGMY 22MM - VACUUM OVEN 300°C

Code	Watt	Volt	Cap	Bulb	Diameter (mm)	Max. L (mm)	Avg Life (h)	Rated Lumens	Pack Qty
08072	15	240	E27	Clear	22	49	1000	100	100




PIGMY 28MM - VACUUM OVEN 300°C

Code	Watt	Volt	Cap	Bulb	Diameter (mm)	Max. L (mm)	Avg Life (h)	Rated Lumens	Pack Qty
08076	15	240	E14	Clear	28	63	1000	100	100



TUBULAR 25/72MM - OVEN 300°C

Code	Watt	Volt	Cap	Bulb	Diameter (mm)	Max. L (mm)	Avg Life (h)	Rated Lumens	Pack Qty
07742	25	230	E14	Clear	25	72	1000	185	100




BALL 25MM - VACUUM OVEN 300°C

Code	Watt	Volt	Cap	Bulb	Diameter (mm)	Max. L (mm)	Avg Life (h)	Rated Lumens	Pack Qty
36603	15	230	E14	Clear	25	47	1000	100	100



GLS 60MM - OVEN


Code	Watt	Volt	Cap	Bulb	Diameter (mm)	Max. L (mm)	Avg Life (h)	Rated Lumens	Pack Qty
29360	40	230	E27	Clear	60	104	1500	290	100
29363	40	230	B22	Clear	60	103	1500	290	100
29380	60	230	E27	Clear	60	104	1500	550	100
29383	60	230	B22	Clear	60	103	1500	550	100
29390	75	230	E27	Clear	60	104	1500	765	100
29391	75	230	B22	Clear	60	103	1500	765	100
29400	100	230	E27	Clear	60	104	1500	1130	100
29403	100	230	B22	Clear	60	103	1500	1130	100



Rough Service

GLS 60MM - ROUGH SERVICE



Code	Watt	Volt	Cap	Bulb	Diameter (mm)	Max. L (mm)	Avg Life (h)	Rated Lumens	Pack Qty
29345	25	230	E27	Frosted	60	104	1500	170	100
09190	40	230	E27	Clear	60	104	1500	290	100
29361	40	230	E27	Frosted	60	104	1500	285	100
29363	40	230	B22	Clear	60	103	1500	290	100
29364	40	240	E27	Frosted	60	104	1500	285	100
29365	40	240	B22	Frosted	60	103	1500	285	100
29381	60	230	E27	Frosted	60	104	1500	560	100
29383	60	230	B22	Clear	60	103	1500	560	100
29384	60	240	E27	Clear	60	104	1500	550	100
29385	60	240	E27	Frosted	60	104	1500	550	100
29386	60	240	B22	Frosted	60	103	1500	550	100
29390	75	230	E27	Clear	60	104	1500	765	100
29391	75	230	B22	Clear	60	103	1500	765	100
29392	75	230	E27	Frosted	60	104	1500	765	100
29401	100	230	E27	Frosted	60	104	1500	1130	100
29403	100	230	B22	Clear	60	103	1500	1130	100
29404	100	240	E27	Clear	60	104	1500	1110	100
29405	100	240	E27	Frosted	60	104	1500	1110	100
29406	100	240	B22	Frosted	60	103	1500	1110	100



Tubular


TUBULAR

Code	Watt	Volt	Cap	Bulb	Diameter (mm)	Max. L (mm)	Avg Life (h)	Rated Lumens	Pack Qty
07340	15	230	E14	Clear	25	72	1000	105	100
07339	15	230	E14	Clear	18	48	1000	100	100
07341	15	240	E14	Clear	25	72	1000	100	100
07350	25	230	E14	Clear	25	72	1000	230	100
07352	25	230	E14	Clear	25	82	1000	230	100
07342	25	230	B22	Clear	25	78	1000	210	100
07351	25	240	E14	Clear	25	72	1000	225	100
07360	40	230	E14	Clear	25	82	1000	415	100
07362	40	230	B22	Clear	25	78	1000	415	100
07370	60	230	E14	Clear	29	92	1000	680	100
07372	60	230	B22	Clear	29	88	1000	680	100



TUBULAR - KRYPTON

Code	Watt	Volt	Cap	Bulb	Diameter (mm)	Max. L (mm)	Avg Life (h)	Rated Lumens	Pack Qty
07344	25	230	E14	Opal	25	82	1000	210	100
07364	40	230	E14	Opal	25	82	1000	400	100
07366	40	230	B22	Opal	25	82	1000	410	100
07374	60	230	E14	Opal	29	92	1000	660	100
07376	60	230	B22	Opal	29	88	1000	660	100



Pigmy

PIGMY


Code	Watt	Volt	Cap	Bulb	Diameter (mm)	Max. L (mm)	Avg Life (h)	Rated Lumens	Pack Qty
08021	15	230	E14	Clear	28	63	1000	105	100
08100	15	240	E14	Clear	28	63	1000	100	100
08023	25	230	E14	Clear	28	63	1000	230	100
08120	25	240	E14	Clear	28	63	1000	225	100
08025	15	230	E14	Opal	28	63	1000	105	100
08026	25	230	E14	Opal	28	63	1000	230	100
08020	15	230	E14	Frosted	28	63	1000	105	100
08022	25	230	E14	Frosted	28	63	1000	230	100



High Wattage

GLS 68MM - HIGH WATTAGE

Code	Watt	Volt	Cap	Bulb	Diameter (mm)	Max. L (mm)	Avg Life (h)	Rated Lumens	Pack Qty
04305	150	230	E27	Clear	68	126	1000	2160	100
04306	150	230	E27	Frosted	68	126	1000	2160	100
04307	150	230	B22	Clear	68	125	1000	2160	100
04308	150	230	B22	Frosted	68	125	1000	2160	100
04309	150	240	E27	Clear	68	126	1000	2150	100
04310	150	240	E27	Frosted	68	126	1000	2150	100
04311	150	240	B22	Clear	68	125	1000	2150	100
04312	150	240	B22	Frosted	68	125	1000	2150	100
04345	200	230	E27	Clear	68	126	1000	3090	100
04346	200	230	E27	Frosted	68	126	1000	3090	100
04347	200	230	B22	Clear	68	125	1000	3090	100
04348	200	230	B22	Frosted	68	125	1000	3090	100
04349	200	240	E27	Clear	68	126	1000	3080	100
04350	200	240	E27	Frosted	68	126	1000	3080	100
04351	200	240	B22	Clear	68	125	1000	3080	100
04352	200	240	B22	Frosted	68	125	1000	3080	100



GLS 88MM - HIGH WATTAGE


Code	Watt	Volt	Cap	Bulb	Diameter (mm)	Max. L (mm)	Avg Life (h)	Rated Lumens	Pack Qty
10007	300	240	E27	Clear	88	175	1000	4550	10
10006	300	230	E40	Clear	88	187	1000	4510	10
10008	300	240	E40	Clear	88	187	1000	4550	10



Low Voltage


BALL 45MM - 24V

Code	Watt	Volt	Cap	Bulb	Diameter (mm)	Max. L (mm)	Avg Life (h)	Rated Lumens	Pack Qty
09861	25	24	E27	Clear	45	71	1000	340	100
09859	25	24	B22	Clear	45	70	1000	340	100
09885	40	24	E27	Clear	45	71	1000	610	100
09883	40	24	B22	Clear	45	70	1000	610	100
09909	60	24	E27	Clear	45	71	1000	960	100
09907	60	24	B22	Clear	45	70	1000	960	100




GLS 60MM - 24V


Code	Watt	Volt	Cap	Bulb	Diameter (mm)	Max. L (mm)	Avg Life (h)	Rated Lumens	Pack Qty
09728	60	24	E27	Clear	60	104	1000	960	100
09729	60	24	E27	Frosted	60	104	1000	960	100
09726	60	24	B22	Clear	60	103	1000	960	100
09727	60	24	B22	Frosted	60	103	1000	960	100
09759	75	24	B22	Clear	60	103	1000	1310	100
09780	100	24	E27	Clear	60	104	1000	1800	100
09781	100	24	E27	Frosted	60	104	1000	1800	100
09779	100	24	B22	Clear	60	103	1000	1800	100
09785	100	24	B22	Frosted	60	103	1000	1800	100



GLS 60MM - 24V - 2500H

Code	Watt	Volt	Cap	Bulb	Diameter (mm)	Max. L (mm)	Avg Life (h)	Rated Lumens	Pack Qty
09668	25	24	E27	Clear	60	104	2500	380	100
09669	25	24	E27	Frosted	60	104	2500	380	100
09667	25	24	B22	Frosted	60	103	2500	380	100
09696	40	24	E27	Clear	60	104	2500	600	100
09697	40	24	E27	Frosted	60	104	2500	600	100
09694	40	24	B22	Clear	60	103	2500	600	100
09695	40	24	B22	Frosted	60	103	2500	600	100



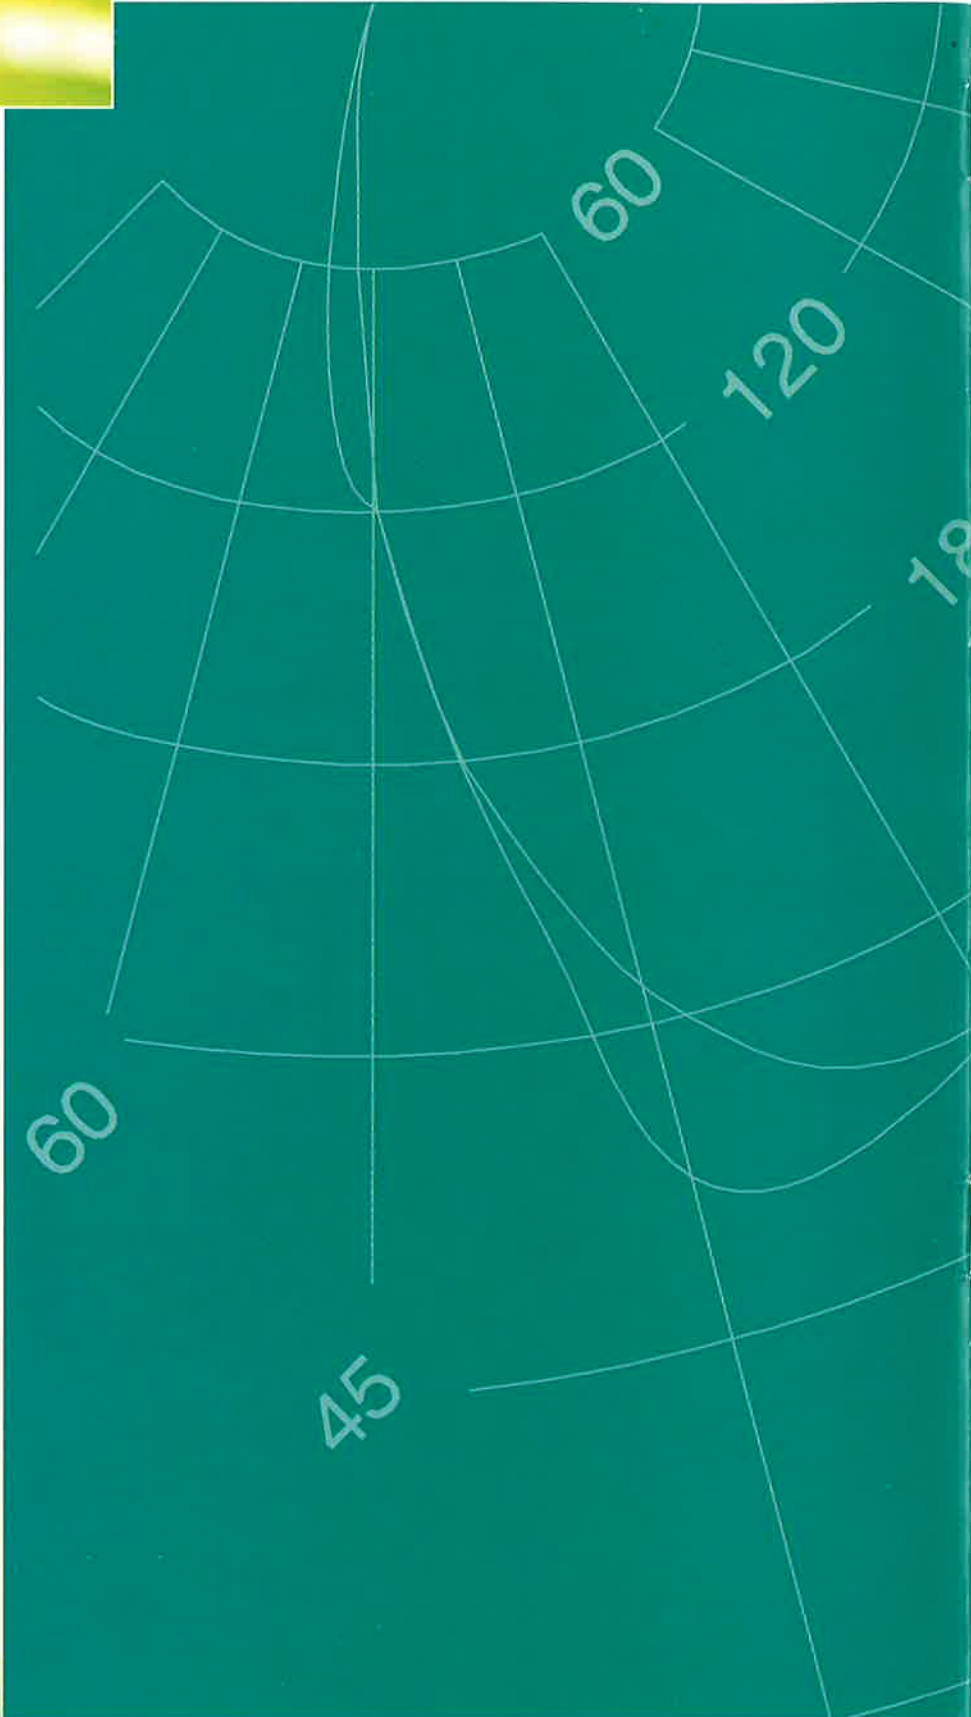

SYLVANIA

Data for guidance only. Sylvania reserves the right to change data without notice.

SYLVANIA LIGHTING INTERNATIONAL, 20 ROUTE DE PRÉ-BOIS, CH-1215 GENEVA 15, SWITZERLAND. TEL + 41 (0)22/717 08 11 FAX + 41 (0)22/798 37 68

SYLVANIA LIGHTING INTERNATIONAL Ltd, AVIS WAY, BN9 OED, TEL: + 44 1273 515811 FAX: + 44 1273 512688